



镁质材料系列、装配式房屋系列
(内外墙、屋顶、地面材料及模块化房
新型建材系列(混凝土、混凝土外加剂、石

Magnesium material series, prefabricated housing series (interior and exterior walls, roofs, floor materials and modular houses), materials series (concrete, mixed soil admixtures, mortar, PC prefabricated components).

New building materials series (concrete, mixed soil admixtures, mortar, PC prefabricated components)

邮箱: sales@jslanquan.com

网址: www.jslanquan.com

地址：江苏省镇江市丹徒区谷阳东大道100号

Email: sales@jslanquan.com

Website :www.jslanquan.com

Add: No. 100, Guyang East Avenue, Dantu District, Zhenjiang City, Jiangsu Province



2024 产品宣传画册 PRODUCT BROCHURE

Tel : +8618205049903(Whatsapp)

WEB: www.Ianquanbu11d.com

Email: jane@jsl안전.com/sales@jsl안전.com

江苏蓝圈新材料股份有限公司

JIANG SU LAN QUAN NEW MATERIAL CO.,LTD

彩石金属瓦类型

COLORED STONE METAL TILE TYPE

连体瓦、仿古瓦、圆弧瓦、彩虹瓦、方格瓦、木纹瓦、米兰瓦、斜边瓦、波浪瓦、深罗马、鱼鳞瓦、石板瓦、都铎瓦、南非瓦、配件、小青瓦、西班牙瓦、挂瓦条、竹节瓦。

Conjoined tile, antique tile, arctile, rainbow tile, square tile, wood grain tile, Milan tile, bevelled tile, wavy tile, deep Roman, fish scale tile, SLATE tile, Tudor tile, South African tile, accessories, small green tile, Spanish tile, hanging tile, bamboo tile.



1 连体瓦

厚度: 0.4mm
瓦片尺寸: 860*830mm*0.4mm
安装尺寸: 830*770mm*0.4mm
覆盖面积: 0.62pcs
单位面积重量: 3.2kgs/sqm
Conjoined tile
Thickness: 0.4mm
Tile size: 860*830mm*0.4mm
Installation size: 830*770mm*0.4mm
Covering area: 0.62pcs
Weight per unit area: 3.2kgs/sqm



2 仿古瓦

厚度: 0.4mm
瓦片尺寸: 730*740mm*0.4mm
安装尺寸: 650*700mm*0.4mm
覆盖面积: 0.455pcs
单位面积重量: 2.8kgs/sqm
Antique tile
Thickness: 0.4mm
Tile size: 730*740mm*0.4mm
Installation size: 650*700mm*0.4mm
Covering area: 0.455pcs
Weight per unit area: 2.8kgs/sqm




3 圆弧瓦

圆弧型彩石瓦是最早推出的瓦型，圆润珠滑的外观即美观又易于导水，非常受市场的喜好。再加上结构的新颖奠定了发展推广的坚实基础。
厚度: 0.4mm 瓦片尺寸: 1340*420mm*0.4mm
安装尺寸: 1280*370mm*0.4mm 覆盖面积: 2.1pcs
单位面积重量: 6kgs/sqm
Arc tile
Circular arc colored stone tile is the first tile introduced, the appearance of rounded beads is beautiful and easy to guide water, very favored by the market.
In addition, the novel structure has laid a solid foundation for development and promotion.
Thickness: 0.4mm
Tile size: 1340*420mm*0.4mm
Installation size: 1280*370mm*0.4mm
Covering area: 2.1pcs
Unit area weight: 6kgs/sqm



4 彩虹瓦

彩虹型彩石瓦是建筑板块不可或缺的瓦型，凹凸弧形的瓦使用任何材料制造都是最常见的瓦型，金属连成一体的结构使其功能更好，是陶土瓦无法达到的工艺。
厚度: 0.4mm 瓦片尺寸: 1300*420mm*0.4mm
安装尺寸: 1250*370mm*0.4mm 覆盖面积: 2.3pcs
单位面积重量: 6.2kgs/sqm
Rainbow tile
Rainbow colored stone tile is an indispensable tile type of building plate, concave and convex curved tile using any material is the most common tile type, metal connected into one structure makes its function better, is the process that clay tile can not reach.
Thickness: 0.4mm
Tile size: 1300*420mm*0.4mm
Installation size: 1250*370mm*0.4mm
Covering area: 2.3pcs
Weight per unit area: 6.2kgs/sqm



5 方格瓦

方格型彩石瓦是后现代的一种新设计，在滚压好条纹的基础上再压制方格模块，使简单的图案下跳跃出活跃的纹线覆盖后百看不厌。
厚度: 0.4mm 瓦片尺寸: 1340*420mm*0.4mm
安装尺寸: 1290*370mm*0.4mm 覆盖面积: 2.1pcs
单位面积重量: 6kgs/sqm
Square tile
Grid type colored stone tile is a new design of post-modern, in the basis of rolling the stripes and then pressing the grid module, so that the simple pattern jumps out of the active line coverage.
Thickness: 0.4mm
Tile size: 1340*420mm*0.4mm
Installation size: 1290*370mm*0.4mm
Covering area: 2.1pcs
Unit area weight: 6kgs/sqm



6 木纹瓦

木纹型彩石瓦是金属模仿天然木材的又一典范，粗木纹的设计把木材粗犷感表露无遗，既保护了森林又展现了木质感的屋面，缔造不同材料的相互共生使用。
厚度: 0.4mm 瓦片尺寸: 1340*420mm*0.4mm
安装尺寸: 1290*370mm*0.4mm 覆盖面积: 2.1pcs
单位面积重量: 6kgs/sqm
Wood grain tile
Wood grain type colored stone tile is another example of metal imitating natural wood. The design of rough wood grain reveals the rough sense of wood, which not only protects the forest but also shows the wood sense of the roof, creating the mutual symbiosis of different materials.
Thickness: 0.4mm
Tile size: 1340*420mm*0.4mm
Installation size: 1290*370mm*0.4mm
Covering area: 2.1pcs
Unit area weight: 6kgs/sqm



7 米兰瓦

米兰瓦轻巧坚固，耐久。具有流畅的曲线感、凹凸有序的层次感，能够完美展现不同建筑美感提升建筑物的品味和档次。
厚度: 0.4mm
瓦片尺寸: 1340*420mm*0.4mm
安装尺寸: 1290*370mm*0.4mm
覆盖面积: 2.1pcs
单位面积重量: 6kgs/sqm
Milan tile
Milan tile is light, strong and durable. With a smooth sense of curve, convex and orderly sense of hierarchy, can perfectly show different architectural beauty to enhance the taste and grade of buildings.
Thickness: 0.4mm
Tile size: 1340*420mm*0.4mm
Installation size: 1290*370mm*0.4mm
Covering area: 2.1pcs
Unit area weight: 6kgs/sqm



8 斜边瓦

斜边瓦有着更变异的图案，显得屋面更有个性，坚强不屈，有棱角的线条刻画，展现屋顶刚毅的精神，居住其下更有安全感。
厚度: 0.4mm
瓦片尺寸: 1340*420mm*0.4mm
安装尺寸: 1290*370mm*0.4mm
覆盖面积: 2.1pcs
单位面积重量: 6kgs/sqm
Bevelled tile
The bevelled tile has a more variable pattern, which shows that the roof has more personality, is strong and unyielding, and the angular lines depict the resolute spirit of the roof, and the living under it is more secure.
Thickness: 0.4mm
Tile size: 1340*420mm*0.4mm
Installation size: 1290*370mm*0.4mm
Covering area: 2.1pcs
Unit area weight: 6kgs/sqm



9 波浪瓦

波浪型彩石瓦是模仿波浪形状的瓦型，线条圆滑、流畅而且坚固耐久，使整个房屋显得和谐中庸。
厚度: 0.4mm
瓦片尺寸: 1300*420mm*0.4mm
安装尺寸: 1250*370mm*0.4mm
覆盖面积: 2.3pcs
单位面积重量: 6kgs/sqm
Corrugated tile
Wavy colored stone tile is a tile that imitates the shape of waves. Its lines are smooth, smooth and durable, making the whole house appear harmonious and moderate.
Thickness: 0.4mm
Tile size: 1300*420mm*0.4mm
Installation size: 1250*370mm*0.4mm
Covering area: 2.3pcs
Unit area weight: 6kgs/sqm



Tel : +8618205049903(Whatsapp)

WEB: www.lanquanbuid.com

Email: jane@lanquanbuid.com/sales@lanquanbuid.com

10 深罗马

深罗马，弧度大，有仿古瓦的外型，粗放，圆润。
厚度: 0.4mm
瓦片尺寸: 1300*420mm*0.4mm
安装尺寸: 1250*370mm*0.4mm
覆盖面积: 2.3pcs
单位面积重量: 6kgs/sqm
Deep Rome
Deep Roman, large arc, antique tile appearance, extensive, round.
Thickness: 0.4mm
Tile size: 1300*420mm*0.4mm
Installation size: 1250*370mm*0.4mm
Covering area: 2.3pcs
Unit area weight: 6kgs/sqm

11 鱼鳞瓦

厚度: 0.4mm
瓦片尺寸: 600*210mm*0.4mm
安装尺寸: 1250*370mm*0.4mm
覆盖面积: 11pcs
Fish scale tile
Thickness: 0.4mm
Tile size: 600*210mm*0.4mm
Installation size: 1250*370mm*0.4mm
Covering area: 11pcs
Unit area weight: 6kgs/sqm

12 石板瓦

厚度: 0.4mm
瓦片尺寸: 1380*420mm*0.4mm
安装尺寸: 1290*370mm*0.4mm
覆盖面积: 2.1pcs
单位面积重量: 6kgs/sqm
SLATE
Thickness: 0.4mm
Tile size: 1380*420mm*0.4mm
Installation size: 1290*370mm*0.4mm
Covering area: 2.1pcs
Unit area weight: 6kgs/sqm

13 都铎瓦

厚度: 0.4mm
瓦片尺寸: 1340*420mm*0.4mm
安装尺寸: 1280*370mm*0.4mm
覆盖面积: 2.1pcs
单位面积重量: 6kgs/sqm
Tudo tile
Thickness: 0.4mm
Tile size: 1340*420mm*0.4mm
Installation size: 1280*370mm*0.4mm
Covering area: 2.1pcs
Unit area weight: 6kgs/sqm

14 南非瓦

厚度: 0.4mm
瓦片尺寸: 1700*420mm*0.4mm
安装尺寸: 1640*370mm*0.4mm
覆盖面积: 1.67pcs
单位面积重量: 7.2kgs/sqm
Afrika Tile
Thickness: 0.4mm
Tile size: 1700*420mm*0.4mm
Installation size: 1640*370mm*0.4mm
Covering area: 1.67pcs
Weight per unit area: 7.2kgs/sqm

15 配件 attachment

竹节瓦
厚度: 0.4mm
瓦片尺寸: 790*Nmm*0.4mm
有效面积: 700*Nmm*0.4mm
Bamboo joint tile
Thickness: 0.4mm
Tile size: 790*Nmm*0.4mm
Effective area: 700*Nmm*0.4mm

16 小青瓦

厚度: 0.4mm
瓦片尺寸: 600*740mm*0.4mm
安装尺寸: 540*680mm*0.4mm
覆盖面积: 2.3pcs
单位面积重量: 2.8kgs/sqm
Small green tile
Thickness: 0.4mm
Tile size: 600*740mm*0.4mm
Installation size: 540*680mm*0.4mm
Covering area: 2.3pcs
Weight per unit area: 2.8kgs/sqm

17 西班牙瓦

厚度: 0.4mm
瓦片尺寸: 1280*420mm*0.4mm
安装尺寸: 1220*370mm*0.4mm
覆盖面积: 2.4pcs
单位面积重量: 5.9kgs/sqm
Spanish tile
Thickness: 0.4mm
Tile size: 1280*420mm*0.4mm
Installation size: 1220*370mm*0.4mm
Covering area: 2.4pcs
Weight per unit area: 5.9kgs/sqm

竹节瓦
厚度: 0.4mm
瓦片尺寸: 790*Nmm*0.4mm
有效面积: 700*Nmm*0.4mm
Bamboo joint tile
Thickness: 0.4mm
Tile size: 790*Nmm*0.4mm
Effective area: 700*Nmm*0.4mm

16 铜瓦 Copper tile

彩石金属瓦特性
彩石金属瓦有超强的耐候性、耐火性且能抗御积雪、抗御冰雹、抗雪、抗风、抗雨，经济实用、施工简单、科学系统，可重复施工。
Colored stone metal wattage
Color stone metal tile has super weather resistance, fire resistance and can resist snow, hail, snow, wind, rain, economic and practical, simple construction, scientific system, can be repeated construction.

17 主要配件 ACCESSORIES



金属雕花板

METAL CARVING BOARD

产品名称Product name

金属雕花保温装饰板
Metal carved thermal insulation decorative board

产品材质Product material

外 面 层：热镀铝锌钢板
Outer layer: hot plated aluminum zinc steel plateSandwich

夹 心 层：硬质聚氨酯B1/B2级防火等级

layer: rigid polyurethane B1/B2 fire ratingBack

背 面 层：硬质防潮铝箔纸

layer: hard moisture proof aluminum foil paperPaint

漆面涂层：高耐候、耐高低温氟碳漆涂层

coating: high weather resistance, high and low temperature fluorocarbon paint

产品规格Product specification

长度: 2000–6000mm(可定制)

宽度: 383mm

厚度: 16mm8片/包(可定)

金属雕花板可广泛的应用于市政建设、公寓住宅、办公会馆、别墅、园林景点、旧楼改造、门卫岗亭等诸多工程领域。该建材既适用于新建的砖混结构、框架结构、钢结构、轻体房等类型的建筑，也适用于既有建筑的装饰节能改造，以及室内外装饰。

Length:2000–6000mm(customizable)

Width: 383mm

Thickness: 16mm 8 pieces/bag (optional)

Metal carving board can be widely used in municipal construction, apartment houses, office halls, villas, Garden attractions, old building renovation, guard box and many other engineering fields. The building material is suitable for new brick-concrete structure, frame structure, steel structure, light body house and other types of buildings. It is also suitable for energy-saving renovation of existing buildings, as well as indoor and outdoor decoration.

产品参数Product parameters

外部金属Pu泡沫装饰面板Exterior metal Pu foam trim panel		
产品参数 Product parameters	厚度thickness	16mm
	标准尺寸Standard size	3800/5800*383*16mm
	表面涂层Surface coating	0.25–0.4mm厚雕刻彩漆镀锌钢板0.25–0.4mm thickness carved color paint galvanized steel plate
	核心材料Core material	聚氨酯泡沫polyurethane foam
	面板重量Panel weight	3.25–3.7kg/m ²
	底部材料Bottom material	铝箔aluminum foil
物理参数 physical parameters	使用年限The service life	25-30年25-30 years
	防火等级Fire rating	B1级
	防水率Waterproof rate	0.08%
包装Packing	出口包装Export Packing	3332 m ² , 40 HQ (150 ctn)
	10片/箱10 pieces/ctn	1444 m ² , 20 GP (65 ctn)
应用场景 Application scenarios	酒店、市场、体育馆、别墅、预制件房、办公楼、农舍等 Hotels, markets, stadiums, villas, prefabricated rooms, office buildings, farmhouses, etc	
产品优势 Advantages	安装方便, 保温、防火、隔音、防潮, 强度高, 重量轻, 易清洁 Convenient installation, heat preservation, fire prevention, sound insulation, moisture-proof, high strength, light weight, easy to clean	

适用范围Scope of application



铝单板

ALUMINIUM VENEER

户外铝单板 Outdoor aluminum veneer

户外铝单板采用优质高强度建材专用铝合金板材，其构造主要由面板、加强筋和角码组成。加强筋与板背用电焊螺钉连接，使之成为一个牢固的整体，极大增强了铝单板幕墙的强度与钢性，保证了长期使用中的平整度及抗震能力。

Outdoor aluminum veneer adopts high-quality high-strength building materials special aluminum alloy plate, its structure is mainly composed of panel, reinforcement and corner code. The reinforcement bar and the back of the plate are connected with electric welding screws to make it a solid whole, which greatly enhances the strength and rigidity of the aluminum veneer curtain wall and ensures the flatness and earthquake resistance in long-term use.

铝板幕墙一直在金属幕墙装饰材料中占主导地位，轻量化的材质，减轻建筑的负荷，为高层建筑提供了良好的选择条件。防水、防污、防腐蚀性能优良，保证建筑外表面持久长新。

Aluminum curtain wall has been the dominant metal curtain wall decoration materials, lightweight materials, reduce the load of the building, providing a good choice for high-rise buildings. Waterproof, anti-fouling, anti-corrosion performance is excellent, to ensure that the exterior surface of the building is durable and new.

铝单板分层结构图 Aluminum laminated structure diagram



基板采用优质的高强度铝合金板，其厚度有2.0mm、2.5mm、3.0mm、4.0mm等各种规格。其构造主要由面板、加强筋、角码等部件构成，最大尺寸可达4000mmX1500mmX2000mm(LxWxH)。4000mx1500mx2000mm (LxWxH).The substrate is made of high-quality high-strength aluminum alloy plate with thickness of 2.0mm, 2.5mm, 3.0mm and 4.0mmEtc. Various specifications. Its structure is mainly composed of panel, reinforcement, corner code and other components, with a maximum size of 4000mmX1500mmX2000mm(LxWxH).4000mx1500mx2000mm (LxWxH).


产品介绍：Product Introduction

应用领域主要用于建筑物外墙的装饰装修，如内墙、天花板、吊顶、门厅、门面、包柱、网架结构、户外飘棚等。

Application fields are mainly used for the decoration of external walls of buildings, such as interior walls, ceilings, foyers, facades, pillar, grid structure, outdoor floating shed, etc.



安装结构：Installation structure

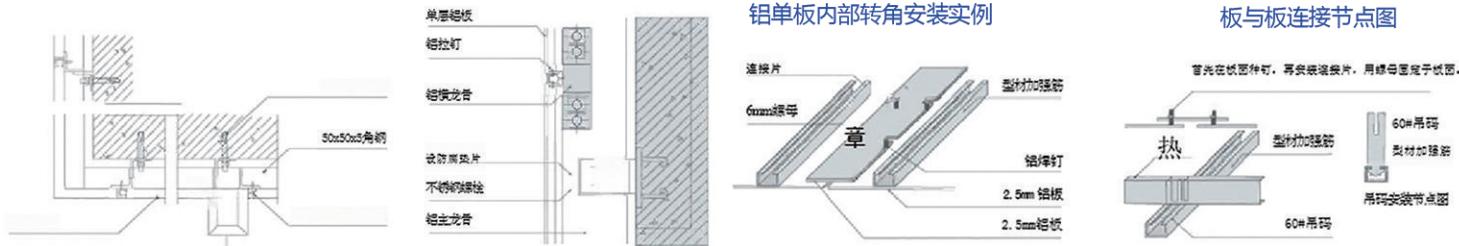


表面处理：Surface treatment

幕墙铝单板表面一般经过清洗、铬化等前处理后，再采用氟碳喷涂处理。氟碳涂料分为底漆、面漆和清漆，主要成份为聚偏氟乙烯树脂(KYNAR500)。氟碳涂层具有卓越的抗腐蚀性和耐候性，能抗酸雨、盐雾和各种空气污染物等，耐冷热性能极好，能抵御强烈紫外线的照射，能长期保持不褪色、不粉化，使用寿命长。表面选用世界知名的氟碳涂料生产商PPG、DNT、AKZO、NIPPON 等公司的优质氟碳涂料，颜色选择广泛，客户直接按厂家提供的色板选用或提供色板样。

The surface of the aluminum veneer of the curtain wall is generally cleaned, chromed and other pre-treatment, and then treated with fluorocarbon spray. Fluorocarbon coatings are divided into primer, topcoat and varnish, and the main component is polyvinylidene fluoride resin (KYNAR500).

Fluorocarbon coating has excellent corrosion resistance and weather resistance, can resist acid rain, salt spray and various air pollutants, cold and heat resistance is excellent, can resist strong ultraviolet irradiation, can maintain long-term color, no powder, so that long service life. The surface selection of the world famous fluorocarbon coating manufacturers PPG, DNT, AKZO, NIPPON and other companies of high quality fluorocarbon coatings, a wide range of color options, customers directly according to the manufacturer to provide color palette selection or sample.

喷涂：Spray

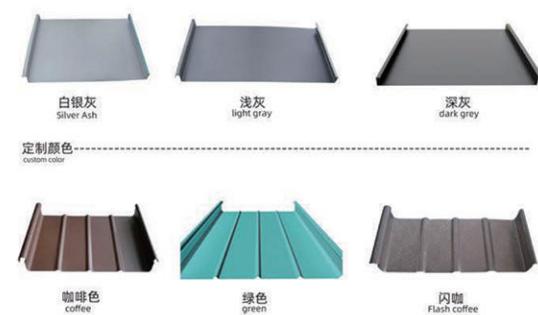

彩涂铝板、钛锌板的颜色选择

Color selection of color coated aluminum plate and titanium zinc plate

钛锌板是一种合金，在符合欧洲质量标准 EN1179 的高纯度 Z1 级金属锌(纯度 99,995%)中加入了钛和铜熔炼而成。特点使用寿命长；低维护；优异延展性；绿色环保材料。

Titanium zinc plate is a kind of alloy, which is melted by adding titanium and copper into high-purity Z1 metal zinc (purity 99995%) conforming to European quality standard en1179. Features long service life; low maintenance; excellent ductility; green environmental protection materials.



室内铝单板：难燃材料，安全环保，无粉尘飞散，无任何有害辐射，且重量轻、强度高、防污、防火、耐酸碱、抗蚀、维护费用低，不怕虫蚊，抗下陷，不易变形，使用寿命长。可塑性高，加工性能佳，可加工成弧形及异形，表面可喷涂成多种颜色，在墙面形成各种美丽的图案，并且可以和玻璃幕墙等组合成不同的外观形体，使建筑物具高贵典雅的风格。

Indoor aluminum veneer: non-combustible material, safety, no dust flying, no harmful radiation, light weight, high strength, anti-fouling, fire, acid and alkali resistance, corrosion resistance, low maintenance cost, not afraid of insects and ants, anti-sinking, not easy to deformation, long service life.High plasticity, Good processing performance, can be processed into curved and shaped, the surface can be sprayed into a variety of colors, forming a variety of beautiful patterns on the wall, and can be combined with glass curtain wall and other different appearance, so that the building has a noble and elegant style.

应用场合：


各种建筑内外墙、大堂门面、柱饰、走廊、人行天桥、电梯包边、阳台包边、广告提示牌、室内异形吊顶等装饰。

Applicable field combination:


All kinds of building interior and exterior walls, lobby facade, column decoration, corridor, pedestrian bridge, elevator edge, balcony edge, advertising signs, indoor shaped ceiling decoration.

铝单板吊顶安装结构图

Схема установки алюминиевых монопластин

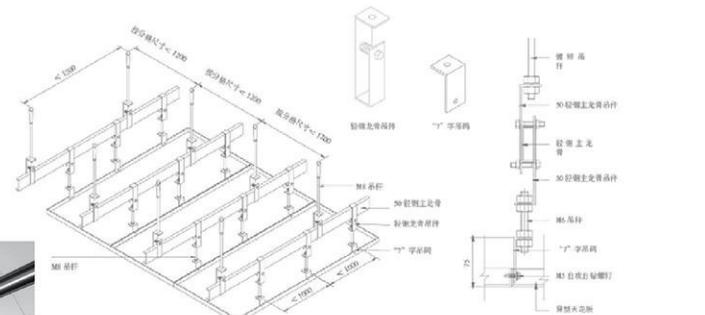

案例：Application

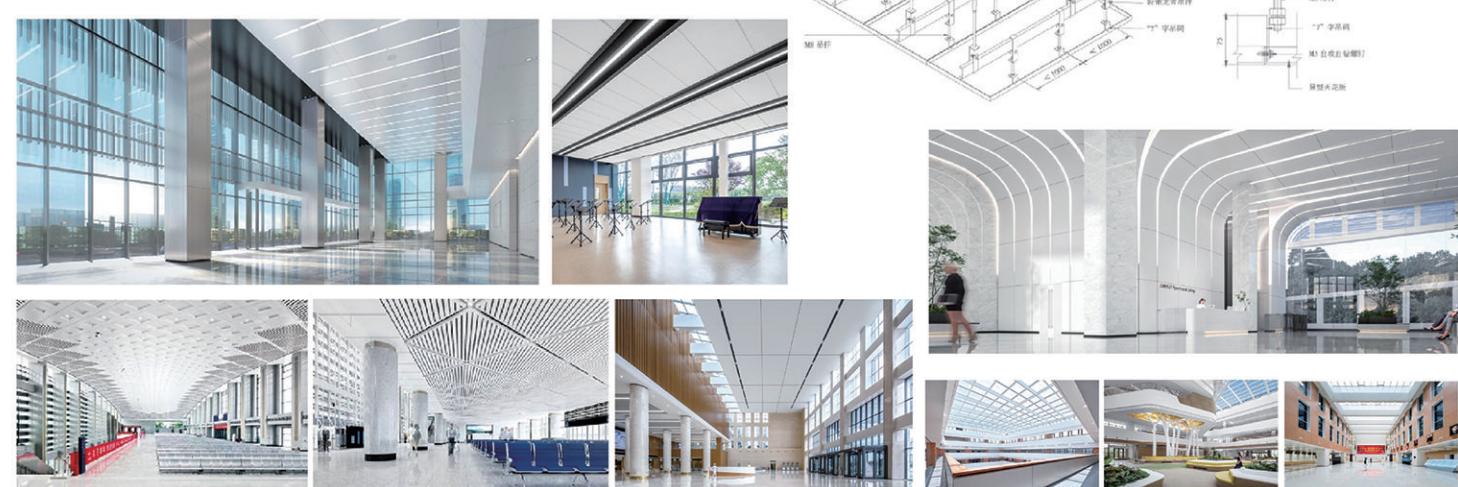

木塑复合材料的一体化解决方案


INTEGRATED SOLUTIONS FOR WOOD-PLASTIC COMPOSITES

蓝圈新材从客户需求出发,基于国内领先的生产工艺和设备,立足于产品的不断创新和突破,致力于为客户提供多层次,高品质的户外塑木材料一体化解决方案。公司产品涵盖塑木空心/实心地板,二代共挤地板,塑木拼装(DIY)地板,塑木护栏/栏杆/栅栏,塑木公园椅,塑木花箱/花池,塑木花架,塑木廊架,塑木凉亭,塑木栈道等数十个品类,上百个品种,广泛应用于各类园林景观及市政项目。

Lanquan new materials from the customer needs, based on the domestic leading production technology and equipment, based on the continuous innovation and breakthrough of products, is committed to providing customers with multi-level, high-quality outdoor plastic wood materials integrated solutions. The company's products cover dozens of categories and hundreds of varieties, including hollow/solid flooring, second-generation co-extruded flooring, wood-plastic assembly (DIY) flooring, wood-plastic guardrail/railing/fence, wood-plastic park chair, wood-plastic flower box/flower pond, wood-plastic flower stand, wood-plastic porch frame, wood-plastic pavilion, wood-plastic plank road, etc., which are widely used in all kinds of garden landscape and municipal projects.

1 产品介绍: product introduction

共挤塑木地板/墙板 (二代) Co-extruded Wood/Wallboard (2nd Generation)

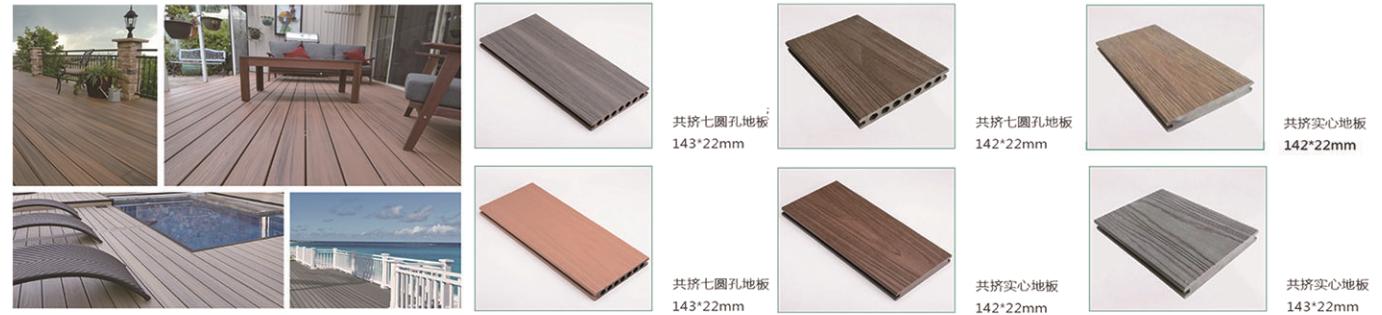

2 特点: Features

- 进口高分子保护层, 高强, 抗压, 耐磨, 抗污。
- 纹理逼真, 质感自然, 纹理层次丰富, 凹凸工艺还原实木质感。
- 双面混色实现了个性化造型, 定制个性化风格

1、细节: 高层子保护层, 塑木内层

2、类型: 压花地板/墙板/护栏/廊架/凉亭/花箱/DIY地板

Imported polymer protective layer, high strength, pressure resistance, wear resistance, stain resistance.

Realistic texture, natural texture, rich texture layers, concave and convex process to restore solid wood texture

Double-sided color mixing to achieve personalized modeling, customized personalized style

1、Details: upper protective layer, plastic wood inner layer

2、Type: embossed floor/wall panel/guardrail/porch frame/pavilion/flower box /DIY floor




■ 常规塑木地板 (一代) Conventional wood Flooring (first generation)


1、空心地板 1、 Hollow floors
2、圆孔地板 2、Round hole floor
3、实心地板 3、Solid floor
4、龙骨和封边 4、Keel and edging




● 空心地板规格 Hollow floor specifications

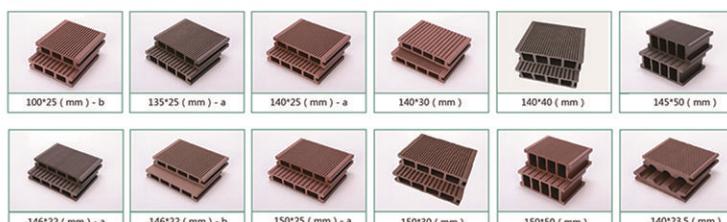


● 实心地板规格 Solid floor specifications

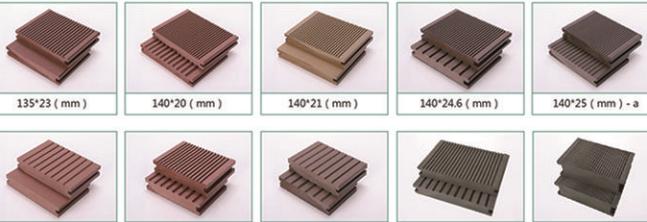

● 圆孔地板规格 Round hole floor specification



● 龙骨和封边 Keels and edging





■ 色卡Color chart



3 安装工艺 Installation process

■ 外挂墙板安装指导 External wall panel installation guide

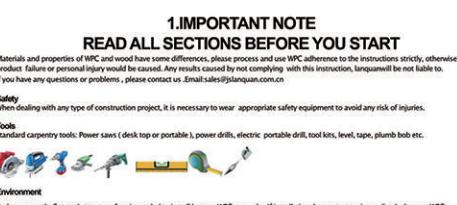

■ 地板安装指导 Floor installation guide



水泥纤维木纹挂板

ALUMINIUM VENEER

产品介绍：Product Introduction

纤维增强外墙木纹挂板是一种人造纤维水泥木纹板。外墙木纹挂板施工及安装容易，能抵受弯曲变形，耐火防火及抗击昆虫侵蚀。其悦目之木纹结构，使您的房屋变得古典雅致，房屋常年保持崭新款式。原材料有高纯度石英粉，高标号水泥，高纯度石灰，植物纤维及其他矿物质组成。原材料按硅钙配比搅拌混合后，经抄取制胚，其后经一天的高压蒸养使其硅钙反应成“托贝莫来石”而硬化。从原材料处理到蒸压后半成品加工，每一道工序均严格控制，保证市场提供品质稳定优良的时尚美观的木纹挂板板材。

Fiber reinforced exterior wall wood grain board is a man-made fiber cement wood grain board. The construction and installation of external wall wood grain panels are easy, can resist bending deformation, fire resistance and insect erosion. Its pleasing wood grain structure makes your house classical and elegant, and the house keeps new style all year round. The raw materials are composed of high purity quartz powder, high grade cement, high purity lime, plant fiber and other minerals. After mixing the raw material of eucalyptus silicon-calcium ratio, it was copied to make the embryo, and then steamed under high pressure for a day to make its silicon-calcium reaction into "Tobermorite" and hardened. From raw material treatment to autoclaved semi-finished product processing, each process is strictly controlled to ensure that the market provides stable quality and excellent fashion and beautiful wood grain hanging board.


产品特性：Product features

- 1、产品质轻：重量仅为同等厚度砖墙的1/5，砌块墙体的1/10。
- 2、保温隔热：导热系数0.176W/(M·K)，与灰砂砖砌块[1.1W(M·K)]相比，隔热性能好。
- 3、防火性能好：不易燃材料，耐火可达4小时。
- 4、装饰功能好：立体的雪松木材纹理，板与板之间可形成无缝表面，可直接用于装饰。
- 5、可施工性能好：使用木工工具便可对木纹水泥板裁切、穿孔、打磨，施工方便。
- 6、绿色：波特兰水泥、植物纤维作为原材料，生产和加工过程不含其他物质。
- 7、舒适的居住功能：独特的“水泥细孔”结构，可在一定范围内调节室内湿度，使居住舒适。
- 8、节省空间：采用本产品做墙体，墙体厚度可减小。
- 9、强度高、寿命较长：抗折强度大于14MPa,用作外墙可有效抵抗外力冲击，使用寿命50年以上。
- 10、适用于各种民用别墅、多层住宅建筑物、艺术场馆的护壁墙、住宅的墙壁板、底衬板、公园的艺术建筑等。

1、Light weight: the weight is only 1/5 of the brick wall of the same thickness, and 1/10 of the block wall.
 2、Thermal insulation: thermal conductivity 0.176W/(M·K), compared with gray sand brick block [1.1W(M·K)], good thermal insulation performance.
 3、Good fire performance: non-flammable material, fire resistance up to 4 hours.
 4、Good decorative function: the three-dimensional cedar wood texture can form a seamless surface between the board and the board, which can be directly used for decoration.
 5、Good construction performance: The use of woodworking tools can be cut, perforated, polished wood grain cement board, convenient construction.
 6、Green: Portland cement, plant fiber as raw materials, production and processing process does not contain other substances.
 7、Comfortable living function: The unique "cement porous" structure can adjust the indoor humidity within a certain range to make living comfortable.
 8、Space saving: Using this product as the wall, the wall thickness can be reduced.
 9、High strength, long life: flexural strength is greater than 14MPa, used as an external wall can effectively resist external impact, service life of more than 50 years.
 10. Suitable for all kinds of civil villas, multi-storey residential buildings, art venue wall wall, residential wall panels, backing panels, park art buildings, etc.



颜色多样
可以定制

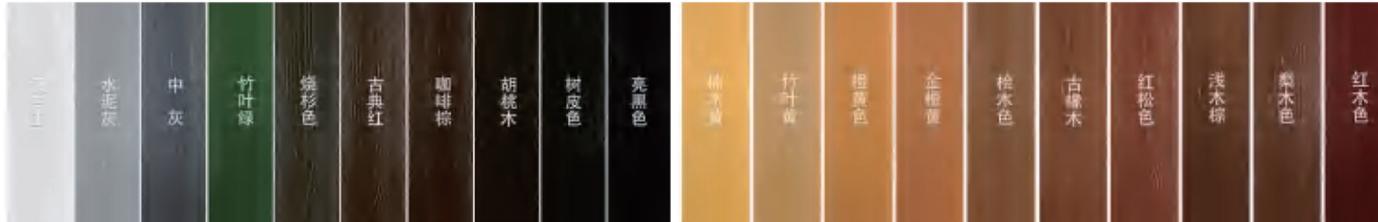

规 格

产品尺寸	3000*1200 mm可定制	Product size:	3000*1200 mm can be customized
宽 度	20/30/40/60 (mm)	Width:	20/30/40/60 (mm)
厚 度	8-24 (mm)	Thickness:	8-24 (mm)
密 度	1.3 (g/m)	Density:	1.3 (g/m)

镁板 MAGNESIUM OXIDE BOARD

玻镁板（别名：防火板、轻钙板、镁矿板、硅酸钙板）是以不燃材料硫氧镁、氧化镁、耐碱玻纤布、木屑等为主要材料，用特殊生产工艺经全套自动化流水线设备加工而成。

具有环保、无味、无毒、不燃无烟、高强质轻、隔音保温、防水防火、不冻不腐、胀缩率极微而不裂、不变形等多项优点。

Magnesium Oxide board (alias: fire board, light calcium board, magnesium ore board, calcium silicate board) is based on non-combustible materials Magnesium sulfate, magnesium oxide, alkali resistant glass fiber cloth, wood chips and other main materials, with a special production process by a full set of automatic production line equipment processing.

It has many advantages such as environmental protection, tasteless, non-toxic, non-combustible and smoke-free, high strength and light weight, sound insulation and insulation, waterproof and fireproof, non-freezing and non-rot, very small expansion and contraction rate and no cracking, no deformation, etc.

产品特点 Product characteristics

■ A1级阻燃，更安全；	■ 原料无木，更环保；
■ 无醛无木，更健康；	■ 防火防水，更安全；
■ 防霉防虫，更持久；	■ 轻质高强，更耐磨。
■ A1 flame retardant, safer;	■ Raw materials without wood, more environmentally friendly;
■ No aldehyde, no wood, healthier;	■ Fireproof and waterproof, safer;
■ mildew and insect resistant, more durable;	■ Light weight, high strength, more wear-resistant;



适用范围 Scope of application

玻镁板广泛应用于宾馆、商场、酒楼、夜总会、银行、医院、超市、写字楼及家用住宅等多种内部装修的隔墙、吊顶。它完全适应隔热保温结构，隔音墙体、活动隔墙、特级防火、防火门内夹板、设备箱体外包装等区域。

Widely used in hotels, shopping malls, restaurants, nightclubs, banks, hospitals, supermarkets, office buildings and residential and other internal decoration of the partition wall, ceiling. It fully adapts to heat insulation structure, sound insulation wall, movable partition wall, special protection fire, fireproof door inner plywood, equipment container outer packaging and other areas.



产品分类 Product classification

- 镁基板 base board
- 镁基装饰墙板 Magnesium base decorative wall panels
- 砂光板 Sanding plate
- 镁质地板 Magnesium flooring
- 烟道板 Flue plate



基材板 Substrate board



净化板 Clean panel



市政项目烟道板 Municipal project smoke duct board



吸音板 Sound-absorbing panel



装饰板 Mounting plate



发货 Dispatch goods